



**Battery Strapping Tool**  
**19 mm - 25 mm - 32 mm PET Strap**



**OMS27**

Strong, powerful and reliable, the **OMS27** is the ideal battery-powered strapping tool with **three operating modes**, specifically designed for use with **19 mm, 25 mm, and 32 mm PET straps** (19 mm guide strap kit available upon request).

Well-balanced and easy to operate with just one hand, the **OMS27** can be used in **fully automatic, semi-automatic, and manual modes**.

Equipped with brushless motors, the tool ensures **low maintenance, high speed**, and enhanced **electronic control**.

Its dedicated **high-efficiency, long-life Lithium-Ion battery** provides a high number of duty cycles per charge, with no memory effect.

The **OMS27** is ideal for all **heavy-duty applications** requiring maximum tension, including those involving **steel, aluminum, hardwood timber**, and other demanding materials, using **high-strength polyester strap**.




### FEATURES

- 3 operating modes: **Automatic/Semi-automatic/Manual**
- **Easy to be used**
- **Digital control Panel**
- **Brushless Motor technology**

### BENEFITS

- **Powerful, for heavy duty applications**
- **Wide range & adjustable tension**
- **Easy use/Ergonomic design**
- **Easy access to wearing parts**
- **Strong and well protected motor housing**

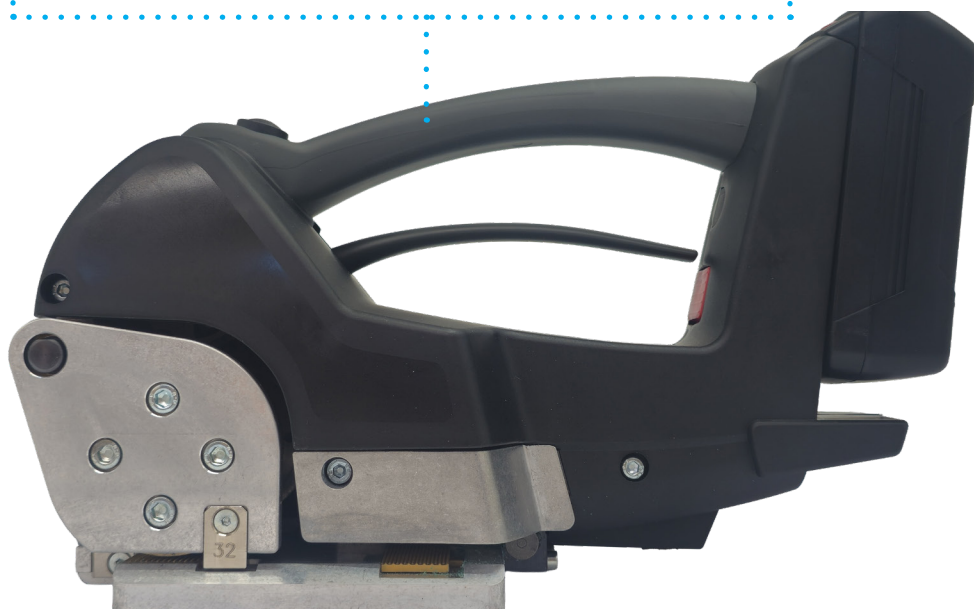

## TECHNICAL SPECIFICATIONS

<b>Dimensions</b>	300 x 150 x 200 mm
<b>Weight (with battery)</b>	6.4 Kg

## STRAP

<b>Type</b>	PET strap
<b>Width</b>	19 mm/25 mm/32 mm
<b>Thickness</b>	0.5 mm - 1.05 mm
<b>Tensile strenght</b>	850 - 1100 N/mm <sup>2</sup>

## POWER SUPPLY

<b>Battery</b>	Li-Ion 36V - 2,5Ah
----------------	--------------------

## PERFORMANCE

<b>Tension force</b>	2700 - 7000 N
<b>Tensioning speed</b>	8 mt/min
<b>Sealing</b>	friction weld weal
<b>Joint strength</b>	75% of breaking strength (variable according to strap type)

## MODEL

CODE	DESCRIPTION
T2799971	OMS27 + 1 Battery + 1 Charger
T2799972	OMS27 + 2 Battery + 1 Charger

# DETAILS



[www.oms-group.com](http://www.oms-group.com)  
[info@oms-group.com](mailto:info@oms-group.com)

